


# Programming Instructions For *NICE* Transmitters (Remotes)

- Step 1)** Press and release the Yellow Learn Button on the receiver inside the Apollo Box (*see Figure 1*). The RED Light next to the Learn Button will turn on and stay on for 5 seconds.
- Step 2)** While the red light on the receiver is turned on, **press and hold** either button on your 2 Button Transmitter (*see Figure 2*) until the light on the Receiver turns off, then release the Transmitter Button. Wait 1 second then press and release transmitter button. The receiver light will blink 3 times indicating the Transmitter is programmed. You are finished. Repeat these steps for programming additional Transmitters.

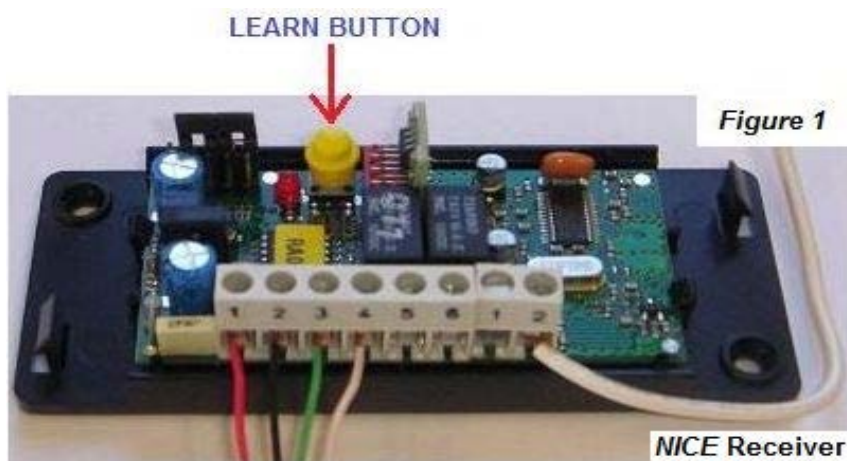

---

## Programming and Wiring Instructions For 2nd Button Used To Control Other Gate Within Close Proximity To Gate Controlled By Primary Button

- Step 1)** Program Transmitters for this gate exactly as described above.
- Step 2)** Remove the Green and White wires from terminal numbers 3 and 4 on the receiver (*see Figure 1*) and move them to terminal numbers 5 and 6 on the receiver (*see Figure 3*).

